


# ENERGIZER 377/376

**ZERO**MERCURY<sup>®</sup>
**SILVER OXIDE**


## Industry Standard Dimensions

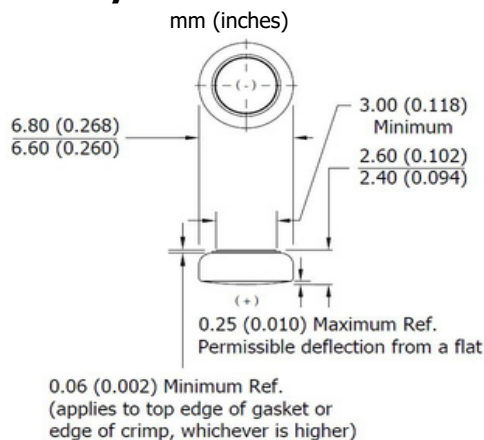


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

## Specifications

<b>Chemical System:</b>	Silver Oxide (Zn/Ag <sub>2</sub> O)
<b>Designation:</b>	ANSI/NEDA-1176SO, IEC-SR66
<b>Nominal Voltage:</b>	1.55 Volts
<b>Typical Capacity:</b>	24 mAh* (to 1.2 volts)
<b>Capacity Test:</b>	47K ohm continuous drain at 21°C
<b>Typical Weight:</b>	0.42 grams (0.015 oz.)
<b>Typical Volume:</b>	0.09 cubic centimeters (0.0063 cubic inch)
<b>Impedance (40 Hz):</b>	15 to 30 ohms


\* Varies according to the applied load, temperature, and cutoff voltage.

## Cross Section

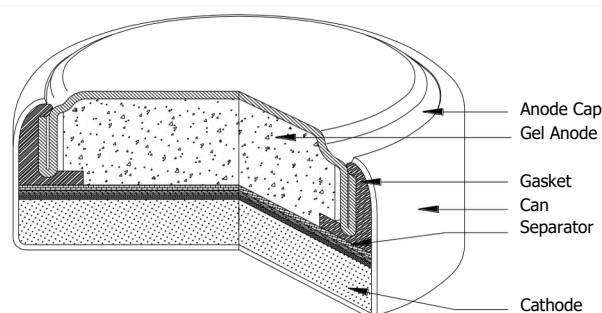

## Typical Discharge Characteristics



Typical Performance at 21°C (70°F)

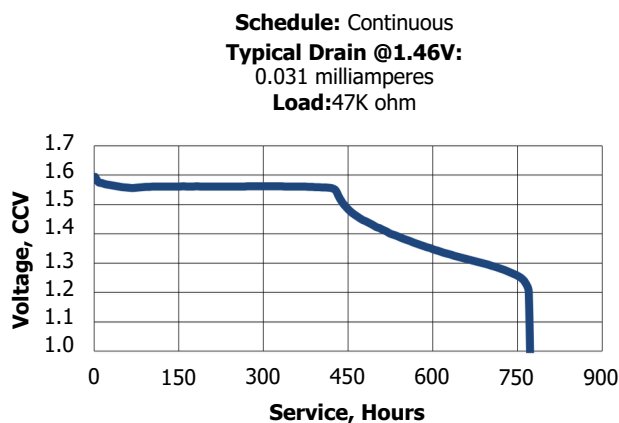

<u>Schedule</u>	<u>Typical Drains</u> at 1.46V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> 1.2V (hours)
Continuous	0.031	47K	773

## Temperature Characteristics

Typical Performance at Low Discharge Rates

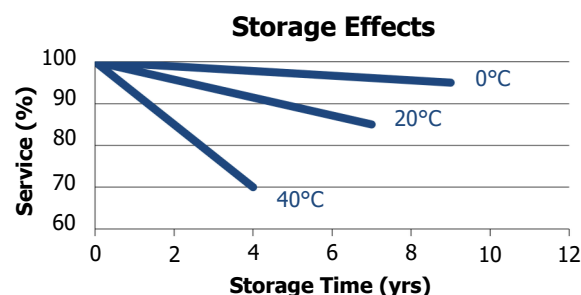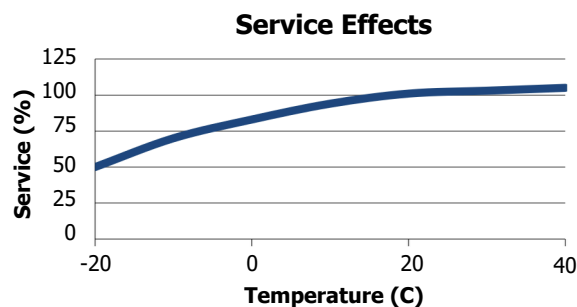

## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

**Contents herein do not constitute a warranty and are for reference only.**